

ND BuildIn 14W twin


Surface and air disinfection

Areas of use:

- Air disinfection for built-in
- Surface disinfection

To be used in:

• Air disinfection	• Conveyor band disinfection
• Surface disinfection	• Inside ventilation systems
• Water tank disinfection	• Dry silo disinfection
• Build in production line	• Equipment disinfection

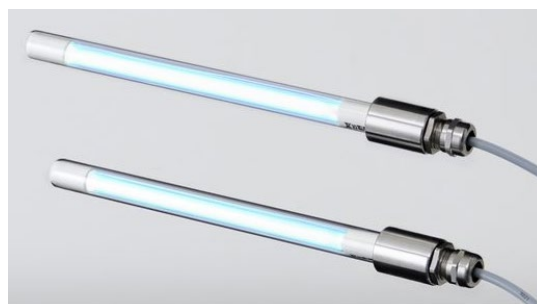

Description:

The UV-unit for surface- and air disinfection can be mounted as desired.

The unit has a high effectiveness in a very compact design.

Glass and stainless steel are acid resistant and can be mounted in aggressive environment.

Technical data:

• Name	ND BuildIn 14W twin	• Arc length	207 mm
• Area of use	Air and surface	• Total length	2 x 355 mm
• Lifetime on bulb	Up to 10.000 hours or 3000 on/off or 2 years from delivery	• Total width	2 x 60 mm
• Temperature range	20-40°C	• Total height	2 x 60 mm
• Numbers of lamps	2	• Weight	2 kg.
• IP	65	• UVC dosage*)	80 µW/cm ²
• Electrical connection	230 V – 2 x 14 W	• Material	Stainless Steel 304

*) The UV dosage is measured at a distance of 100 cm according to the norm and with the use of an approved ballast.

Warning:

UV radiation is dangerous for your skin and eyes! Both your eyes and skin must be appropriately protected from the direct UV light. The user will be responsible for his own safety, as well as for the safety of people who are staying in areas where these units are being used. Please bear in mind that materials which are not UVC-resistant may be damaged.