

ND CleanAccess Air


Surface and air

Areas of use:

- Secure access without particles

To be used at:

• Cleanrooms	• Receiving goods
• Production areas	• Bottling plants
• Stables	• Slaughterhouses
• Clean storage areas	

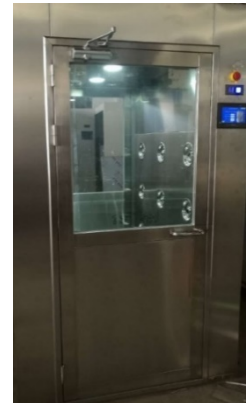

Description:

The sluice is built in stainless steel with two doors. The doors can only be opened individually, ensuring that no contamination can ever occur from one area to another.

The CleanAccess air sluice is treating the object with an air force of up to 25 m/sec.

The sluice is equipped with emergency stop. When activated, the door opens to the unclean side.

CleanAccess is built to orders.

Technical Data:

• Name	ND CleanAccess Air	• Arc length	
• Area of use	Surface and air	• Total length	1300 mm
• Lifetime on bulb		• Total width	1200 mm
• Temperature range	°C	• Total height	2200 mm
• Number of lamps	Not installed	• Weight	
• IP	54	• UVC dosage	μW/cm ²
• Electrical connection	230 V	• Material	Stainless Steel 304

Warning:

UV radiation is dangerous for your skin and eyes! Both your eyes and skin must be appropriately protected from the direct UV light. The user will be responsible for his own safety, as well as for the safety of people who are staying in areas where these units are being used. Please bear in mind that materials which are not UVC-resistant may be damaged.